

Products Features

- ▶ Combined by 4 Bar Lights.
- ▶ Each Bar Lights can be adjusted from 0° to 90°.
- ▶ The intensity of each Bar Lights can be controlled separatly.


Customization

- Dimensions
- Emitting anlge
- Power
- Cable length
- Mounting
- Connector


Applications the light be used for

- Label inspection.
- Ceramic package things crack inspection.
- QFP and SOP inspection.
- Metal plate surface nspection.
- Package damage inspection.

Model Description

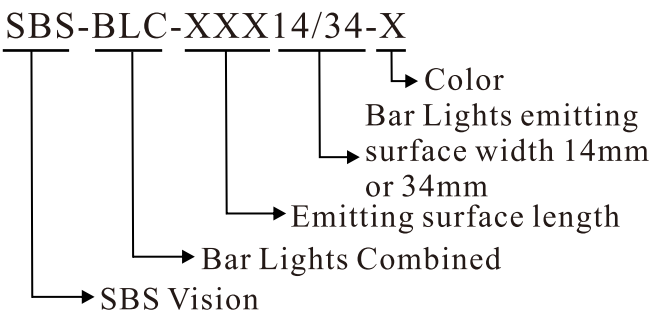

The width of emitting surface of Bar Lights is 14mm or 34mm.

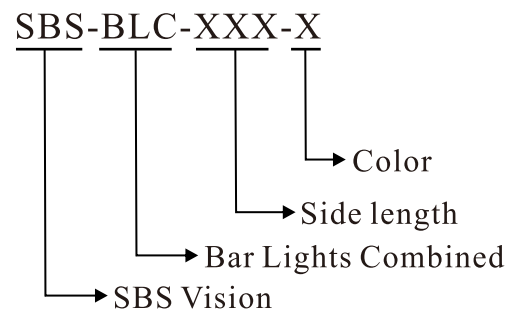


The other Bar Ligths Combined

Structure



Dimensions (mm)

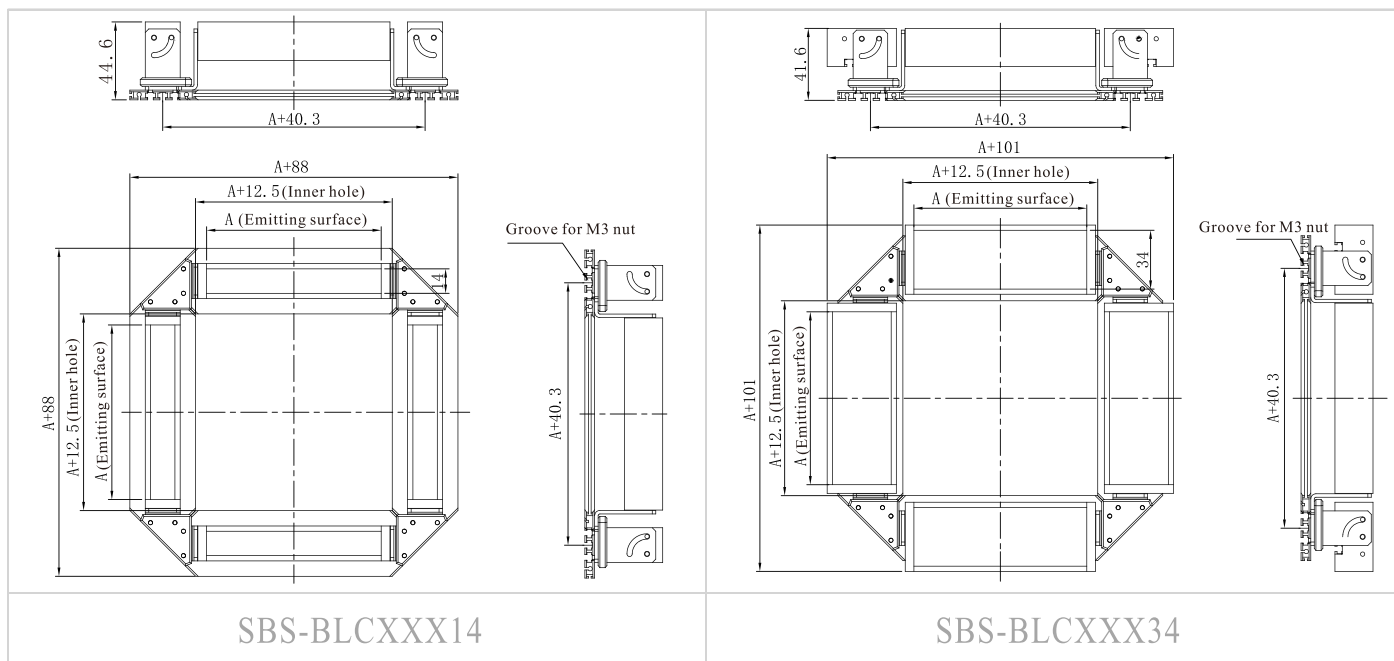

Parameter

Item	Model	Power consumption Red Color	Power consumption (W,B,G)	Option	Extension cable	Recommended Controller
1	SBS-BLC5014	24V/4.8W	24V/7.2W	Diffuser	1m/3m/5m	SBS-AC24-2B (Analog controller) SBS-DC24-2B (Digital controller) SBS-SC24-B (Strobe controller)
2	SBS-BLC10014	24V/9.6W	24V/14.4W	Diffuser	1m/3m/5m	
3	SBS-BLC15014	24V/14.4W	24V/21.6W	Diffuser	1m/3m/5m	
4	SBS-BLC20014	24V/19.2W	24V/28.8W	Diffuser	1m/3m/5m	
5	SBS-BLC25014	24V/24.0W	24V/36.0W	Diffuser	1m/3m/5m	
6	SBS-BLC30014	24V/28.8W	24V/43.2W	Diffuser	1m/3m/5m	
7	SBS-BLC35014	24V/33.6W	24V/50.4W	Diffuser	1m/3m/5m	
8	SBS-BLC40014	24V/38.4W	24V/57.6W	Diffuser	1m/3m/5m	
9	SBS-BLC45014	24V/43.2W	24V/64.8W	Diffuser	1m/3m/5m	
10	SBS-BLC50014	24V/48.0W	24V/72.0W	Diffuser	1m/3m/5m	
11	SBS-BLC55014	24V/52.8W	24V/79.2W	Diffuser	1m/3m/5m	
12	SBS-BLC60014	24V/57.6W	24V/86.4W	Diffuser	1m/3m/5m	
13	SBS-BLC5034	24V/9.6W	24V/14.4W	Diffuser	1m/3m/5m	
14	SBS-BLC10034	24V/19.2W	24V/28.8W	Diffuser	1m/3m/5m	
15	SBS-BLC15034	24V/28.8W	24V/43.2W	Diffuser	1m/3m/5m	
16	SBS-BLC20034	24V/38.4W	24V/57.6W	Diffuser	1m/3m/5m	
17	SBS-BLC25034	24V/48.0W	24V/64.8W	Diffuser	1m/3m/5m	




vision solution SBS-BLC series


Item	Model	Power consumption Red Color	Power consumption (W,B,G)	Option	Extension cable	Recommended Controller
18	SBS-BLC30034	24V/57.6W	24V/86.4W	Diffuser	1m/3m/5m	SBS-AC24-2B (Analog controller) SBS-DC24-2B (Digital controller) SBS-SC24-B (Strobe controller)
19	SBS-BLC35034	24V/67.2W	24V/100.8W	Diffuser	1m/3m/5m	
20	SBS-BLC40034	24V/76.8W	24V/115.2W	Diffuser	1m/3m/5m	
21	SBS-BLC45034	24V/86.4W	24V/129.6W	Diffuser	1m/3m/5m	
22	SBS-BLC50034	24V/96.0W	24V/144.0W	Diffuser	1m/3m/5m	
23	SBS-BLC55034	24V/105.6W	24V/158.4W	Diffuser	1m/3m/5m	
24	SBS-BLC60034	24V/115.2W	24V/172.8W	Diffuser	1m/3m/5m	

The other Bar Lights Combined.


Item	Model	Power consumption Red Color	Power consumption (W,B,G)	Option	Extension cable	Recommended Controller
1	SBS-BLC78	24V/2.0W	24V/3.9W	Diffuser	1m/3m/5m	SBS-AC24-2B (Analog controller) SBS-DC24-2B (Digital controller) SBS-SC24-B (Strobe controller)
2	SBS-BLC112	24V/5.2W	24V/7.6W	Diffuser	1m/3m/5m	
3	SBS-BLC140	24V/10.4W	24V/12.4W	Diffuser	1m/3m/5m	
4	SBS-BLC154	24V/14.0W	24V/24.4W	Diffuser	1m/3m/5m	
5	SBS-BLC200	24V/9.6W	24V/14.0W	Diffuser	1m/3m/5m	

Dimensions (mm)

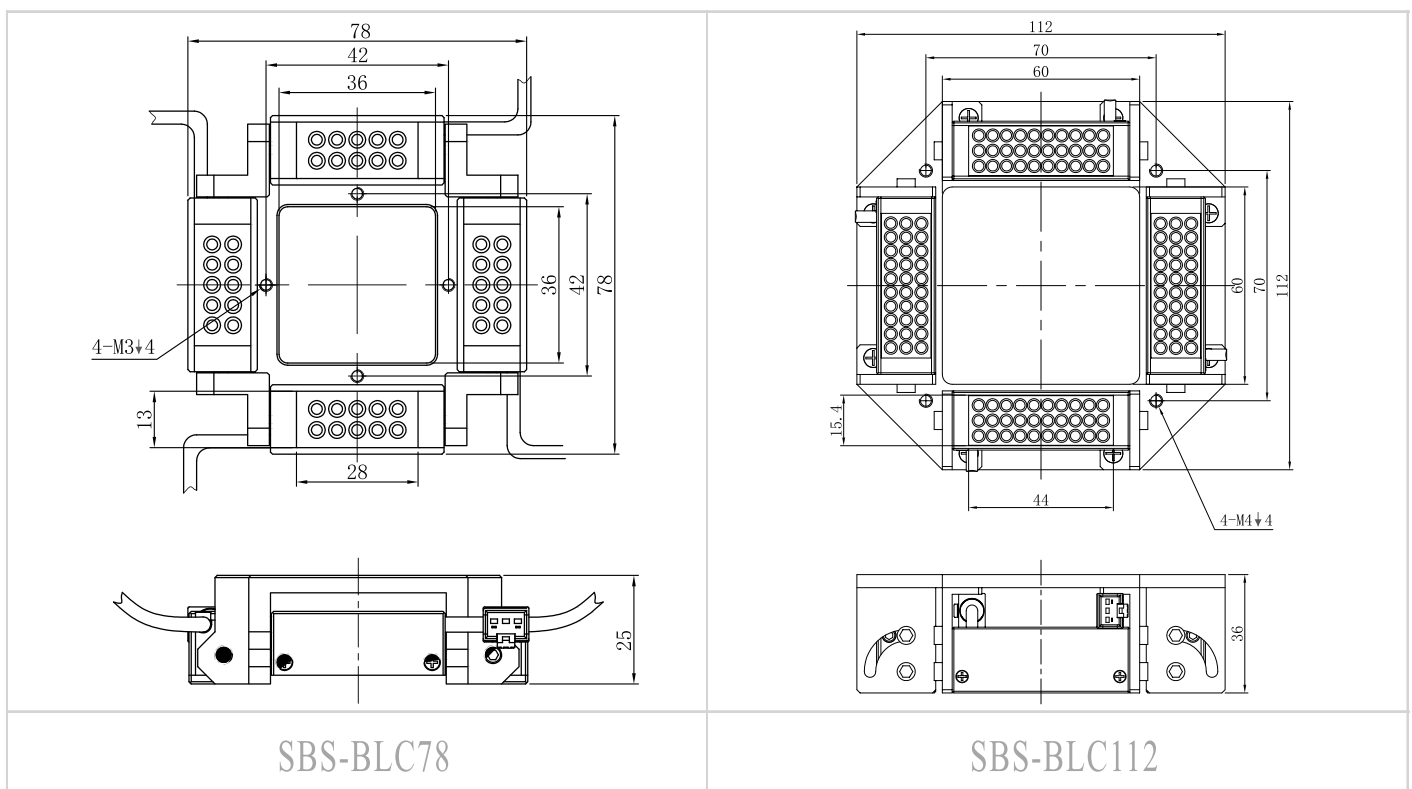


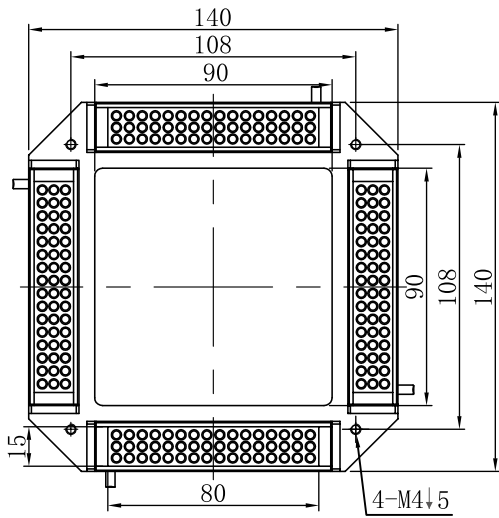

SBS-BLC140

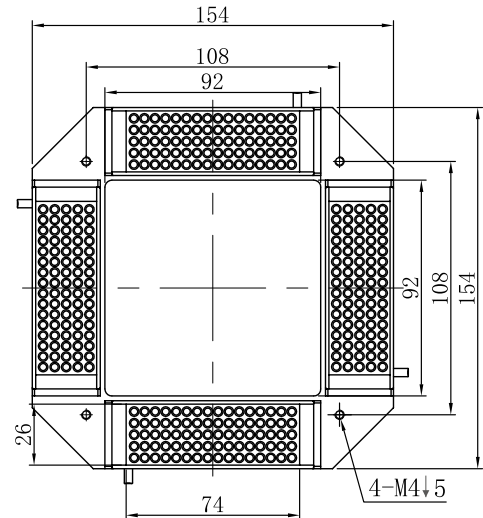

SBS-BLC154

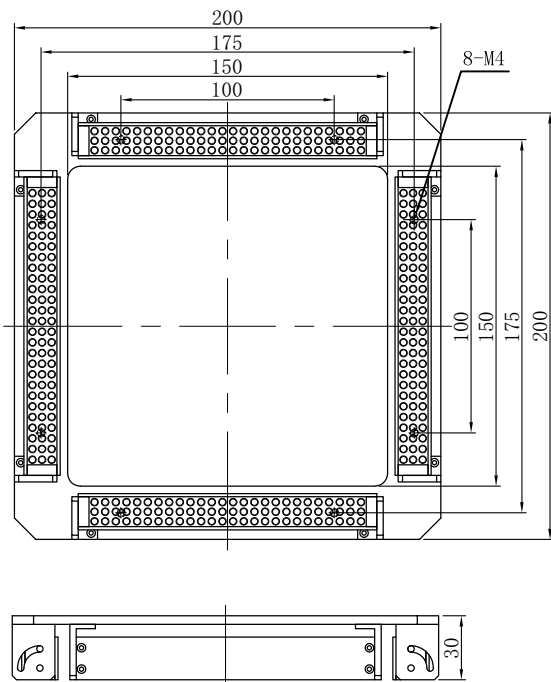

SBS-BLC200